


BXX52-P

防爆检修电流插座箱(ⅡB)

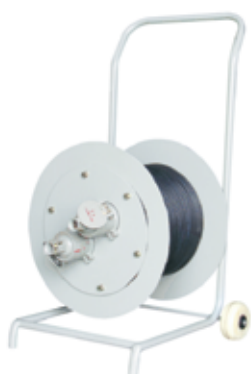

适用范围 Application

- 适用于1区、2区危险场所。
- 适用于ⅡA、ⅡB类，温度组别为T1~T4的爆炸性气体环境。
- Can be used in hazardous areas: Zone 1 and Zone 2
- Can be used in explosive gas atmospheres of Category IIA and IIB where the temperature classification is T1 ~ T4.

型号含义 Model implication

BXX	52	-/P	□	□	□	K	□	T	
									特殊要求(不要求不注) Special requirement (required to be marked)
									额定电流(不带不注) Rated current (not to be marked if not any)
									带总开关(不带不注) With main switch (not to be marked if not any)
									额定电流 Rated current
									支路数 Branch quantity
									电缆长度(米) Cable length (meter)
									电缆盘 Cable reel
									设计序号 Design No.
									防爆检修电流插座箱 Explosion-proof power distribution box

技术参数 Technical parameters

- | | |
|--|---|
| <ul style="list-style-type: none"> ■ 执行标准: GB3836.1、GB3836.2、GB3836.3、IEC60079 ■ 防爆标志: Exde Ⅱ BT4 Gb ■ 额定电压: AC220V、AC380V/50Hz ■ 防护等级: IP54、*IP65 ■ 防腐等级: WF1 ■ 总开关电流: 32A、63A ■ 出线口螺纹: G3/4"、G11/4" ■ 电缆规格: Φ9mm ~ Φ14mm、Φ15mm ~ Φ26mm | <ul style="list-style-type: none"> ■ Implementing the standard : GB 3836.1、GB 3836.2、GB 3836.3、IEC60079 ■ Explosion-proof mark: Exde Ⅱ BT4 Gb ■ Rated voltage: AC220V、AC380V/50Hz ■ Protection grade: IP54、*IP65 ■ Explosion-proof class: WF1 ■ Rated current: 32A、63A ■ Outlet thread: G3 / 4 " , G11 / 4 " ■ Cable specification: ϕ 9mm ~ ϕ 14mm, ϕ 15mm ~ ϕ 26mm |
|--|---|

BXX52-P

BXX52-P series explosion-proof power distribution box (overhaul cable reel)(II B)

外形及安装举例 Outline and mounting example

