

BZX51


系列防爆行程开关(ⅡB、ⅡC)



适用范围 Application

- 适用于1区、2区危险场所。
- 适用于ⅡA、ⅡB、ⅡC类，温度组别为T1~T6的爆炸性气体环境。
- Can be used in hazardous areas: Zone 1 and Zone 2
- Can be used in explosive gas atmospheres of Category IIA、IIB and、IIC where the temperature classification is T1 ~ T6.

型号含义 Model implication

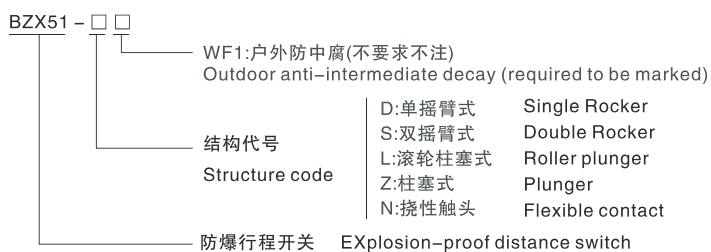

技术参数 Technical parameters

- | | |
|--|--|
| ■ 执行标准: GB 3836.1、GB 3836.2、
GB 3836.3、IEC60079 | ■ Implementing the standard : GB 3836.1、GB 3836.2、
GB 3836.3、IEC60079 |
| ■ 额定电压: AC 380V, DC 220V | ■ Rated voltage: AC380V |
| ■ 额定电流: 5A | ■ Rated current: 5A |
| ■ 防护等级: IP54 | ■ Protection grade: IP54 |

防爆标志 Ex-proof mark	触头数量(对) Contact quantity	进线口螺纹(G") Inlet thread	电缆外径(φ,mm) Cable's outside diameter
Exd II BT6	一常开、一常闭 1NO+1NC	1/2	6~10

BZX51

Type explosion-proof distance switch
(II B, II C)

产品特点 Features

- 壳体采用ZL102铝合金压铸成型，表面高压静电喷塑；
- 产品有单摇臂式、双摇臂式、滚轮柱塞式、柱塞式、挠性触头五种触头型式可供选择；
- 钢管或电缆布线。
- The housing is die cast in aluminum alloy, with high voltage static plastic-sprayed surface.
- Products are single-arm, double arm type, roller plunger, plunger, flexible contact five kinds of contact types to choose from;
- Conduit wiring or cable wiring.

外形及安装举例 Outline and mounting example

